

eralytics<sup>o</sup>

trusted solutions.  
re-imagined.

eraspec oil

# THE LATEST TREND IN OIL CONDITION MONITORING

Standards

ASTM E2412, D7412, D7414, D7415, D7418,  
D7624, DIN 51452, 51453, JOAP

Excellent correlation to

ASTM D445, D664, D2270, D2896, D4739




[www.eralytics.com/eraspec-oil](http://www.eralytics.com/eraspec-oil)

# eraspec oil – high speed lube oil testing with lab-grade precision


## Oil Condition Monitoring

**ERASPEC OIL** can determine parameters relevant in lubricant analysis according to latest infrared standards such as ASTM E2412. It monitors degradation products (oxidation, sulfation, nitration), additive depletion (aminic and phenolic antioxidants, antiwear) and contaminants (water, soot, fuel, FAME, coolant liquid). Complex oil parameters such as TAN and TBN or viscosity are calculated by chemometrical models using a customer-expandable database.

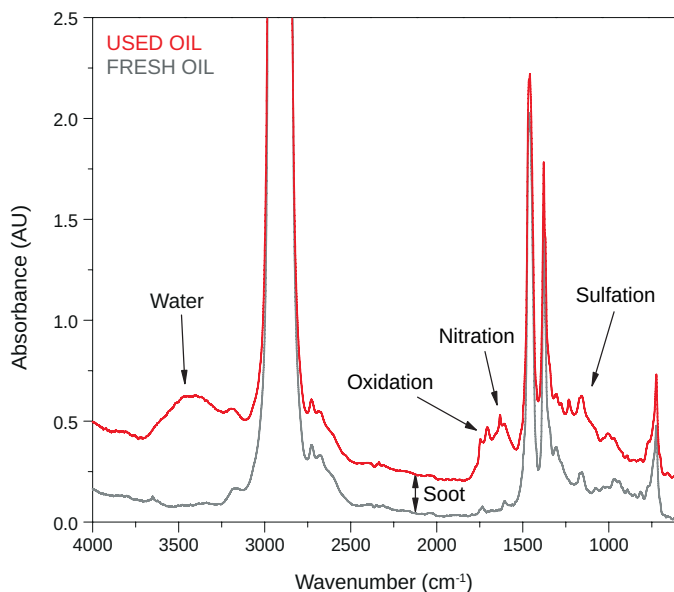



## Portable FTIR Analyzer

**ERASPEC OIL** is a compact, rugged and lightweight FTIR spectrometer that delivers laboratory-grade results in monitoring lubricant conditions. It is the first truly standalone analyzer combining advantages of infrared oil condition monitoring, like fast and reliable results, with high portability. Measurements can be performed directly on-site and the results are available within a few seconds following ASTM, DIN and JOAP methods. With **ERASPEC OIL** there is no need for sending in samples for analysis.

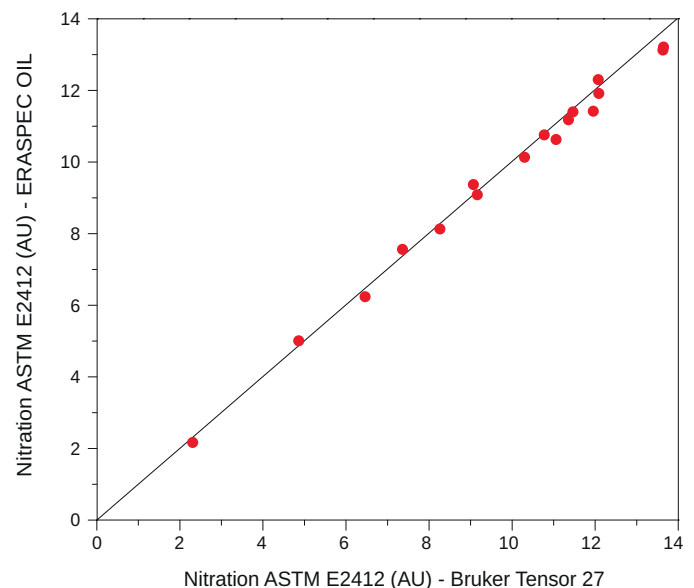

# On-screen Trending Graphs

**ERASPEC OIL** offers the possibility to monitor temporal changes of lubricant parameters directly on-screen. You can either monitor driven distance for engines or operating hours of gas turbines, for example. Simply select the machinery up for testing and run the measurement. Afterwards the system will take you right to the trending chart. That way, for example, a sudden rise in oxidation or a major drop in base reserve will be noted at first glance directly on-site.

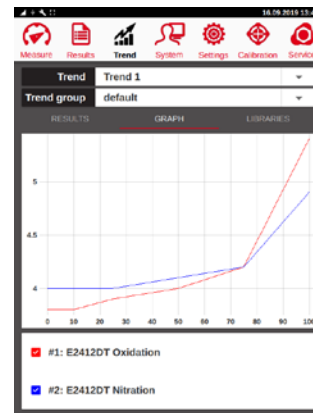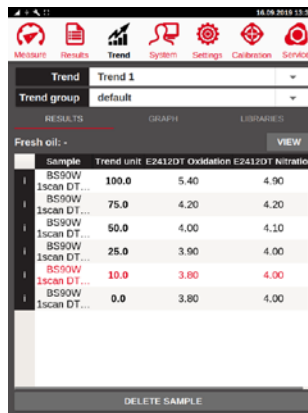

| DEGRADATION | STANDARD                     | UNIT |
|-------------|------------------------------|------|
| Oxidation   | ASTM E2412, D7414, DIN 51453 | A/cm |
| Nitration   | ASTM E2412, D7624, DIN 51453 | A/cm |
| Sulfation   | ASTM E2412, D7415            | A/cm |

| ADDITIVES <sup>2</sup> | STANDARD          | UNIT <sup>3</sup> |
|------------------------|-------------------|-------------------|
| ZDDP Antiwear          | ASTM E2414, D7412 | A/cm, %, wt%      |
| Phenolic Antioxidants  | ASTM D2668        | %, wt%            |
| Aminic Antioxidants    |                   | %, wt%            |

| CONTAMINANTS    | STANDARD              | UNIT <sup>3</sup> |
|-----------------|-----------------------|-------------------|
| Soot            | ASTM E2412, DIN 51452 | A/cm, wt%         |
| Water           | ASTM E2412            | A/cm, wt%         |
| Ethylene Glycol | ASTM E2412            | A/cm, wt%         |
| Diesel Fuel     | ASTM E2412            | A/cm, wt%         |
| Gasoline        | ASTM E2412            | A/cm, wt%         |
| FAME            |                       | wt%               |
| Polyolester     |                       | wt%               |
| Phosphate Ester |                       | wt%               |

| PROPERTIES <sup>1</sup>                                    | CORRELATION TO    | UNIT                   |
|--|-------------------|------------------------|
| TAN  | ASTM D664         | mg KOH g <sup>-1</sup> |
| TBN  | ASTM D2896, D4739 | mg KOH g <sup>-1</sup> |
| VI <sup>*</sup> , Viscosity <sup>*</sup> at 40 °C / 100 °C | ASTM D445, D2270  | VI, cSt                |

\* Requires a customized library

- 1 ... The range and repeatability for all determined properties depend on the used database.
- 2 ... Additive depletion results in % remaining additive are available only for spectral subtraction measurements.
- 3 ... wt% values are determined by an analytics calibration.

## Standard Model

**EO10 ERASPEC OIL**

## Diesel Fuel Module

EO01-DIE optionally extends the measurement capabilities of ERASPEC OIL to diesel fuel.

- Cetane number & index, evaporation and distillation points
- Aromatics, cetane improver, FAME

## Autosampler

Directly attached optional 10-position autosampler



# Technical Specifications of eraspec oil

|                        |   |
|------------------------|---|
| Available Test Methods | ASTM D2668, D7412, D7414, D7415, D7418, D7624, E2412; JOAP; DIN 51452, DIN 51453  |
| Correlation to         | ASTM D445, D664, D2270, D2896, D4739  |
| Spectrometer Type      | Patented mid-FTIR interferometer<br>Laser and temperature controlled design   |
| Measurement Cell       | 100 µm path length sample cell, reference cell<br>Optimized dual position cell design for automated reference measurement without solvent   |
| Calibration            | Factory calibrated with a matrix of international lubricants<br>Eralytics' calibrations for soot, water, glycol, ...  |
| Spectral Libraries     | Easily expandable libraries to adjust measurements to target applications and user-defined parameters   |
| Measurement Principle  | Direct trending: calculation of results without the need to record the fresh oil spectrum<br>Spectral subtraction: fresh oil spectrum used as reference for highest performance and lowest LODs   |
| Measuring Time         | 60–120 seconds depending on the viscosity of the sample; Warm-up time: 30 seconds   |
| Sample Introduction    | Directly from sample container via integrated pump  |
| Sample Viscosity       | 0–2 000 cSt at 20 °C  |
| Sample Volume          | 10 mL   |
| Cleaning               | Automatic rinsing with next sample or solvent<br>Integrated filter to prevent blocking of measurement cell  |
| Display                | Industry proven multilingual color touchscreen  |
| Interfaces             | Built-in PC with Ethernet, USB and RS232 interfaces; Wifi via USB dongle<br>Direct LIMS connectivity and output to printer or PC<br>Optional input by external keyboard, mouse and barcode reader |
| Remote Control         | Remote service capability via Ethernet interface  |
| PC Software            | ERASOFT RCS – remote control Windows® software for multi-instrument remote control, convenient data transfer, viewing spectra and result analysis   |
| Result Database        | Approx. 3 000 detailed test reports and spectra stored in the internal memory   |
| Alarm Tracking         | All alarm messages stored in the result database together with the results  |
| Power Requirements     | Auto-switching 85–264 V AC, 47–63 Hz, max. 150 W (multi-voltage power supply)<br>Field application: 12 V DC (vehicle battery) adapter available   |
| Dimensions / Weight    | 29 x 35 x 34 cm (11.4 x 13.8 x 13.4 in) / 9.7 kg (21.4 lb)  |

Due to continuing product development, specifications are subject to change.

All eralytics products are manufactured under ISO 9001 regulations and are CE, ROHS and UL/CSA compliant. [www.eralytics.com/eraspec-oil](http://www.eralytics.com/eraspec-oil)



eralytics instruments are available worldwide.  
An international network of over 50 authorized and well-trained distributors is ready to answer your inquiries and to offer local support and service.  
[www.eralytics.com/distribution](http://www.eralytics.com/distribution)

eralytics<sup>o</sup>

Autokaderstrasse 29, Building 4A  
1210 Vienna, Austria  
Phone: +43 1 890 50 33 0  
office@eralytics.com  
www.eralytics.com